


Arch
Architectural



Studio Due
emotion and creativity in light

Show
Showlighting



EasyColor wireless and rechargeable line

EasyColor 6

• POWER SUPPLY

Switching power supply (universal main voltage)
Rated voltage: 100-240V~; 50-60Hz
Total Rated power: 25W
Rated current: 0.11A @ 230V - fuse T1.6A
12V 9Ah battery
Battery Charge Time 6 Hours
Battery working autonomy:
- 10 hours with 2-3 color running
- 14 hours in save energy mode

• PHYSICAL

WxDxH: 345x165x360 mm
Weight: 10 Kg.

SOURCE

RGBW
full color

6x4W
total 24 LEDs

1560 total lm
(lm: 300 R, 540 G, 120 B, 600 W)



art. 1204
EASYCOLOR 6 RGBW/FC
Rechargeable Power Pack

EasyColor 12

• POWER SUPPLY

Switching power supply (universal main voltage)
Rated voltage: 100-240V~; 50-60Hz
Total Rated power: 80W (115W on charge)
Rated current: 0.5A @ 230V - fuse T3.15A
Active Power Factor Correction
51.2V 6Ah LiFePO4 battery pack
Battery Charge Time 6 Hours
Battery working autonomy:
- 10 hours with 2-3 color running
- 14 hours in save energy mode

• PHYSICAL

WxDxH: 365x280x470 mm
Weight: 14,5 Kg.

SOURCE

RGBW
full color

12x6W
total 48 LEDs

4680 total lm
(lm: 900 R, 1620 G, 360 B, 1800 W)



art. 1202
EASYCOLOR 12 RGBW/FC
Rechargeable Power Pack


EasyColor RGBW/FC is the newest revolutionary battery powered and main supply wireless controlled colour changer. Available in 3 versions with 6, 12 or 20 powerful RGBW full color LEDs and 25W, 80W or 150W power.

Our rechargeable battery pack fixture, is particularly suitable for events where set - up time is problematic, and the passage of cables is hard.

EasyColor line common features

- **OPTIC**
35mm lenses standard beam 20° (±10°)
On request: lenses for wide beam 40° (±20°)
- **TILT**
manual 220°
- **CONTROL**
Standard interface: RS-485; opto-couplet bi-directional
Protocol: USITT DMX 512
- **SETUP AND CONFIGURATION**
Control panel with touch control technology
LED display with flip function
Dedicated DMX channel for white balance
DMX or automatic mode with MASTER/SLAVE function
Built-in wireless receiver
Intelligent temperature control
Flicker free function
Smooth dimming function
Halogen simulation
CYM emulation
- **IP 66 RATING PROTECTION**
- **DMX CHANNELS**
9 ch mode, 5 ch mode, 4 ch mode

designed and assembled in Italy



SOURCE
20x6W
total 80 LEDs



7800 total lm
(lm: 1500 R, 2700 G, 600 B, 3000 W)



EasyColor 20


• POWER SUPPLY

Switching power supply (universal main voltage)
Rated voltage: 100-240V~; 50-60Hz
Total Rated power: 150W (250W on charge)
Rated current: 1.1A @ 230V - fuse T4A
Active Power Factor Correction
51.2V 12Ah LiFePO4 battery pack
Battery Charge Time 7 Hours
Battery working autonomy:
- 10 hours with 2-3 color running
- 14 hours in save energy mode

• PHYSICAL

WxDxH: 540x270x490 mm
Weight: 25 Kg.

art. 1205
EASYCOLOR 20 RGBW/FC
Rechargeable Power Pack

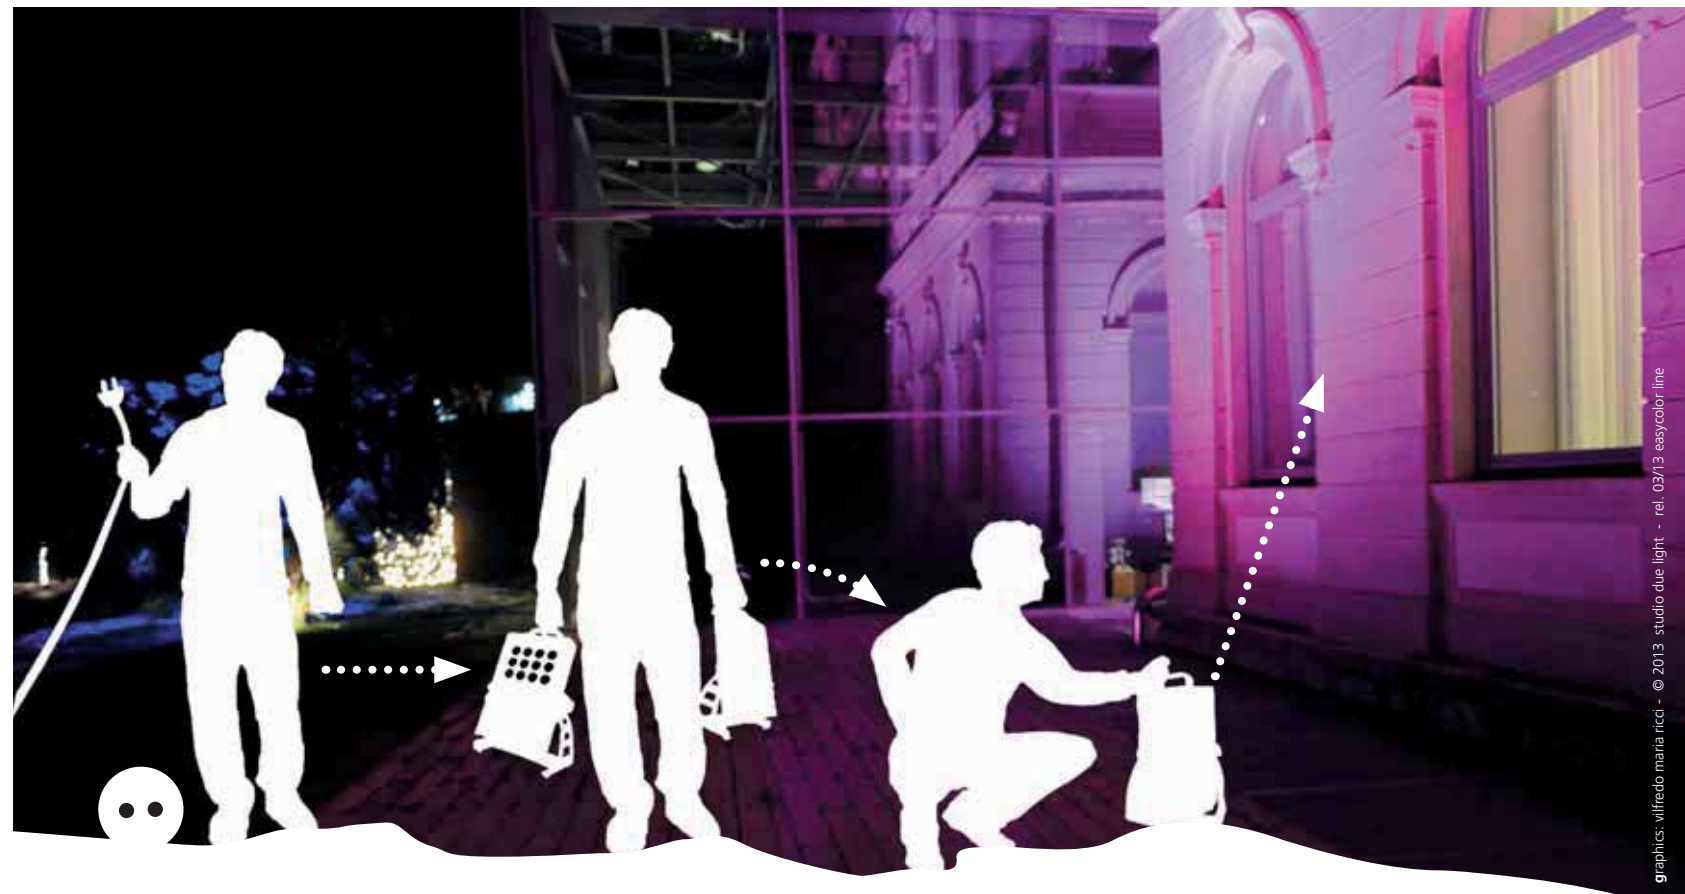

graphics: wilfredo maria ricci - © 2013 studio due light - rel. 03/13 easycolor line

· charge

· bring

· light up

RGBW/full color

venues

mid 12 LEDs

clubs

stages

party

IP66

mini 12 LEDs

art installations

opening

rechargeable

theatres

eco friendly

shops

max 168 LEDs

wireless

temporary events

wedding

Headquarter: STUDIO DUE light s.r.l.

Str. Poggino, 100 - 01100 Viterbo (Italy)

tel. +39.0761.352520 (4 lines)

fax +39.0761.352653

STUDIO DUE UK

3 Encon Court, Owl Close

Moulton Park Industrial Estate

Northampton (England) UK - NN3 6 HZ

tel. +44.1933.650.820

STUDIO DUE Far East LTD

Unit 8, 4/F, Harbour Centre Tower II, 8 Hok Cheung St,

Hunghom, Kowloon (Hong Kong)

tel. +852.29542141 fax +852.23302515


www.studiodue.com

emotion and creativity in light